

KH Thermostatic Mixer - Installation cross-section

KH.320


Key:

A: Minimum distance required from front face of finished wall (without fixing bracket *)
-110mm (not including allowance for pipe-work connections)

B: Minimum distance required from front face of finished wall (with fixing bracket *)
-115mm

C: Threaded tubes must not protrude past finished surface. Recommend 1-2mm below surface

D: Threaded tubes can be reduced by up to 32mm maximum

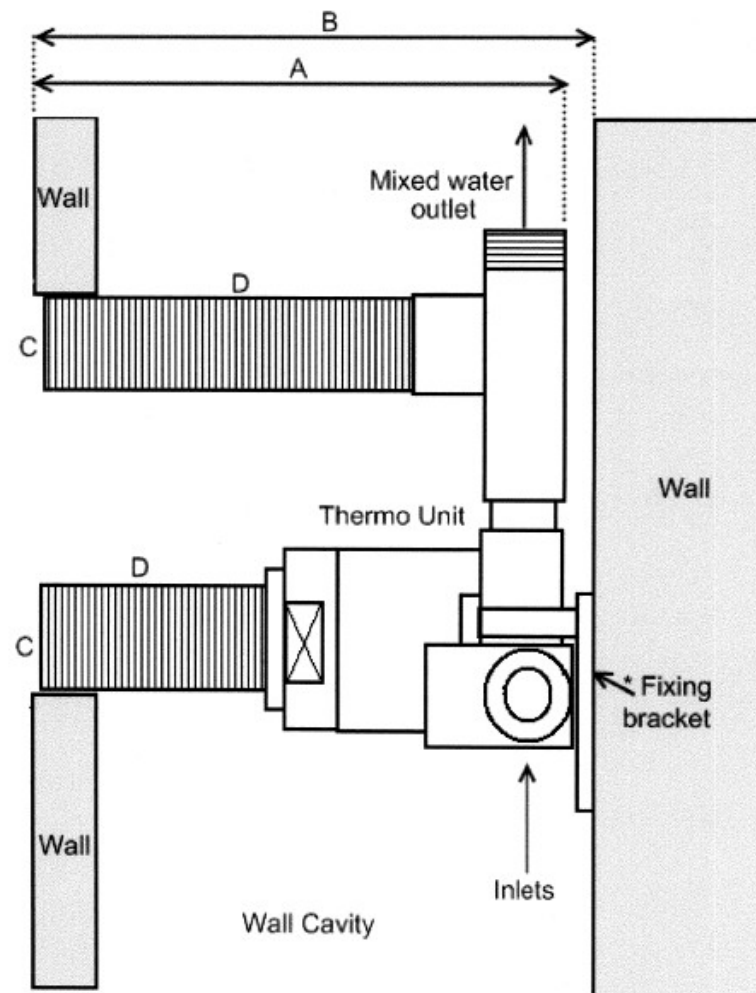

NOT TO SCALE

waterfront